



DS-UN02-01

VALVOLE MANUALI

Manual radiator valves

Serie Universal

Valvole manuali utilizzabili per l'intercettazione dei fluidi negli impianti di riscaldamento. Tutte le valvole sono dotate di codolo con autotenuta in gomma per facilitare l'installazione, ad eccezione di quelle con codice "A" iniziale che non sono dotate del codolo con autotenuta in gomma.

Manual radiator valves for the interception of fluids in heating systems. All the valves are equipped with a tailpiece with rubber self-sealing to facilitate the installation, exception made for all the valves, whose code starts with "A", that don't have tailpiece with rubber self-sealing.

0565 0566
A565 A566

Valvole manuali attacco per tubo rame, plastico e multistrato
Manual radiator valves, connection for copper, plastic and multilayer tubes

0525 0526
A525 A526

Valvole manuali attacco per tubo ferro
Manual radiator valves, iron tube connection



Valvole a squadra
Angled radiator valves

Valvole via diritta
Straight radiator valves



PRESTAZIONI

Fluidi d'impiego	Acqua, soluzioni glicolate
Percentuale di glicole max	30%
Max pressione d'esercizio	10 bar
Max Temp. d'esercizio	100°C

MATERIALI E CARATTERISTICHE TECNICHE

Corpo	Ottone stampato: CW617N UNI EN 12165
Calotta	
Componenti interni	Ottone trafilato: CW614N UNI EN 12164
Volantino	ABS
Elementi di tenuta	Gomma EPDM PEROX


PERFORMANCE

Employed fluids	Water, antifreeze solutions
Max. percentage of glycol	30%
Max working pressure	10 bar
Max working temperature	100°C

MATERIALS AND TECHNICAL FEATURES


Body	Pressed brass: CW617N UNI EN 12165
Nut	
Inside components	Extruded brass: CW614N UNI EN 12164
Handwheel	ABS
Seal elements	EPDM PEROX rubber

Istruzioni Instructions

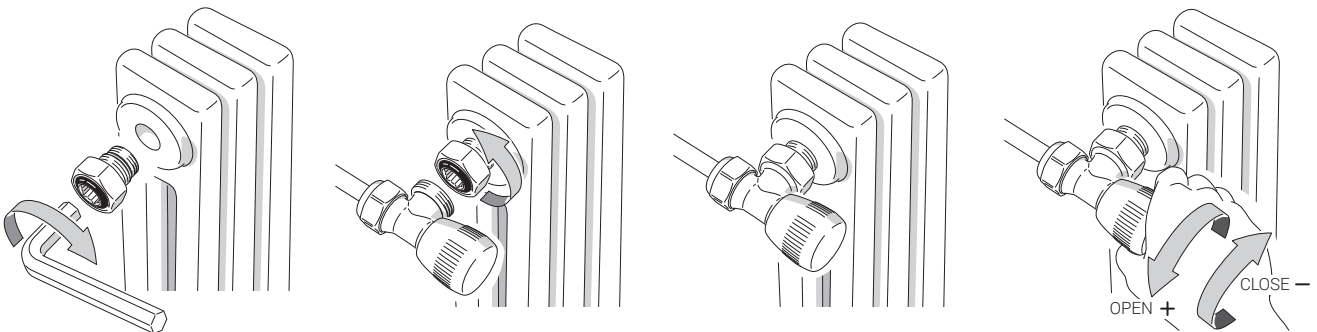


Installazione raccordi Connection installation


Art. 0280

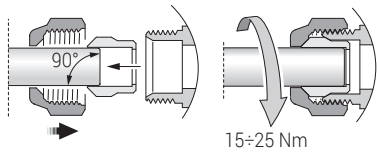

Art. 0281 - E281

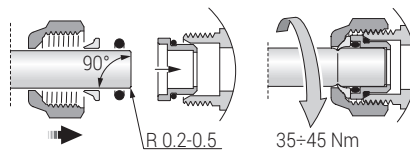


Art. 0282 - 0283 - E283

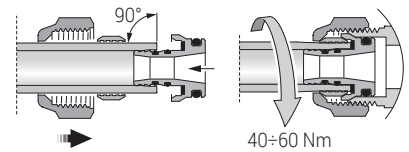


Disegni Drawings

0565




G	F	H	A	L
3/8"	24x19*	64	20	47
1/2"	24x19*	67	23	52

0566




G	F	H	L
3/8"	24x19*	50	81
1/2"	24x19*	50	81

0525



G	H	A	L
3/8"	64	20	47
1/2"	67	23	52
3/4" (A525)	78	26	60

0526




G	H	L
3/8"	50	81
1/2"	50	81
3/4" (A526)	60	95


* = 1/2" - 3/4" E

Diagrammi Diagrams


3/8" 0565 0525 Valvole a squadra
Angled radiator valves

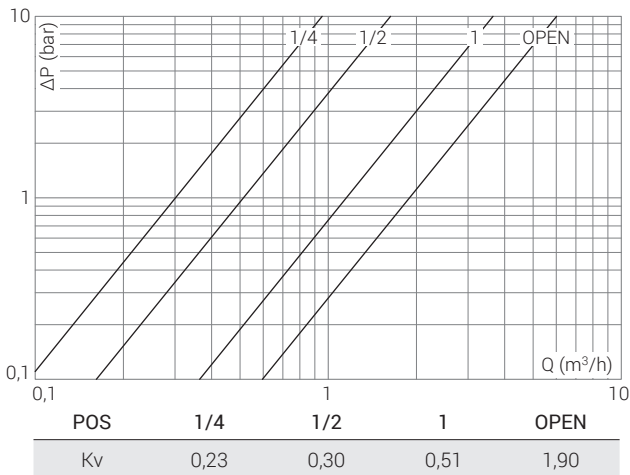


1/2" 0565 0525 Valvole a squadra
Angled radiator valves

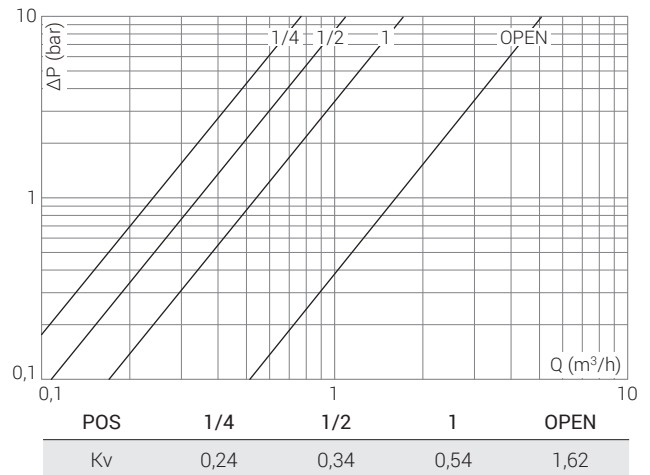


3/4" 0525 Valvole a squadra
Angled radiator valves

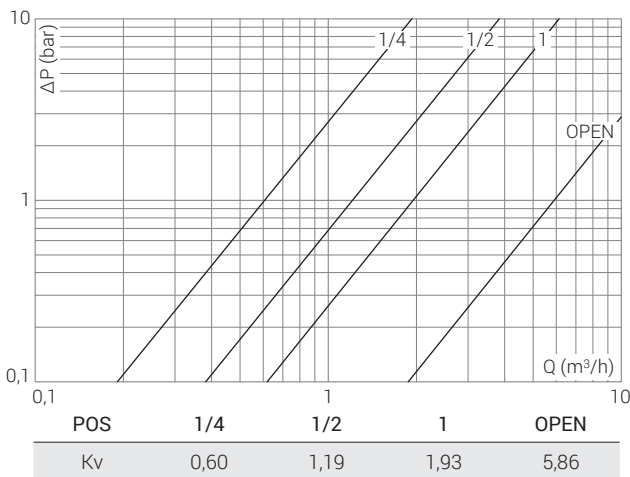


3/8" 0566 0526 Valvole via dritta
Straight radiator valves

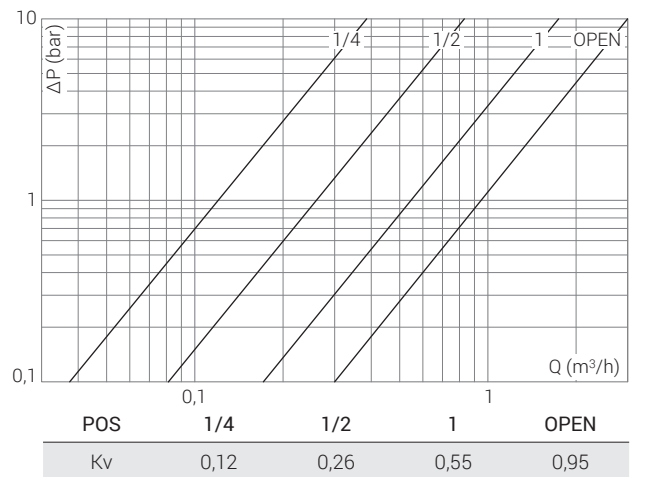

1/2" 0566 0526 Valvole via dritta
Straight radiator valves

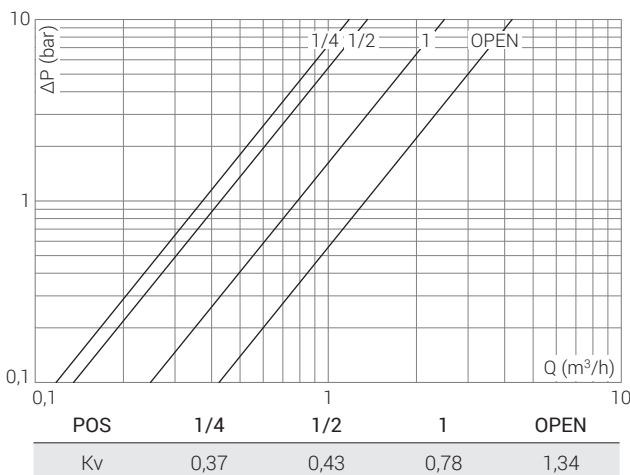

3/4" 0526 Valvole via dritta
Straight radiator valves

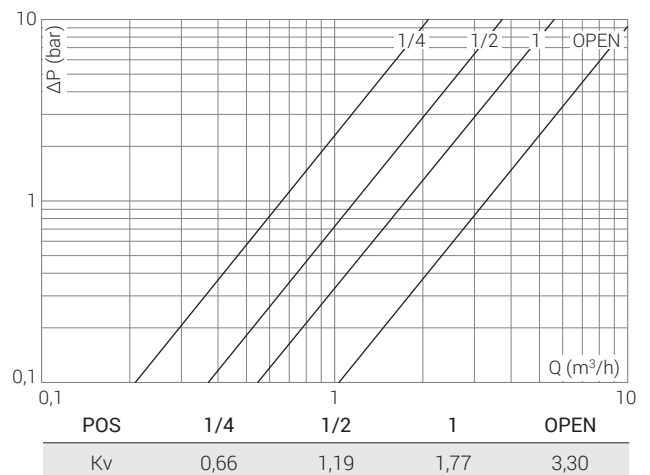



0280

Raccordo per tubo rame a tenuta PTFE.
Copper tube connection with PTFE seal.



0281

Raccordo per tubo rame a tenuta O-ring.
Copper tube connection with O-ring seal.



0282

Raccordo per tubo plastico.
Plastic tube connection.



0283

Raccordo per tubo multistrato.
Multilayer tube connection.



E281 EUROCONO

Raccordo per tubo rame a tenuta O-ring.
Copper tube connection with O-ring seal.



E283 EUROCONO

Raccordo per tubo multistrato.
Multilayer tube connection.



0024

Adattatore 1/2" F x 24/19 F.
Adaptor 1/2" F x 24/19 F.



0027

Prolunga per valvole (30 mm).
Extension for radiator valves (30 mm).



0029

Eccentrico per radiatori
Cam for radiators



R029

Eccentrico per radiatori con calotta
Cam for radiators with nut



0028

Codolo lungo
Long tailpiece



0009

Codolo telescopico
Telescopic tailpiece



0031

Raccordo 1/2" con tubo saldato ø 15 mm.
1/2" connection with welded pipe ø 15 mm.



0490

Rosetta
Wall plate